


ALL-IN-ONE INSTALLATION



1
Unroll All-In-One and cut to fit. Leave a 1/4" gap around walls stairs and supports

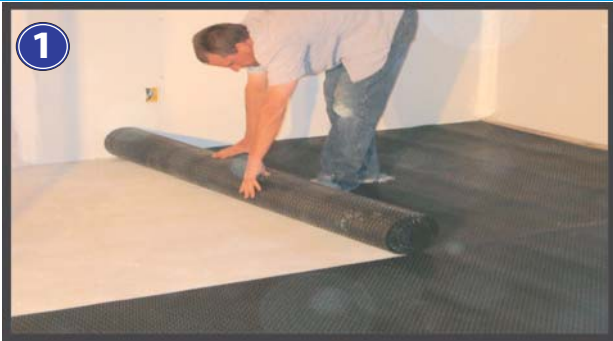


2
Butt edges together and tape seams with vapor barrier tape



3
Install flooring to manufacturers specifications

This brochure is only a guide and is not intended to be an installation instruction. For detailed instructions refer to roll label or go to www.superseal.ca

PRODUCT BENEFITS

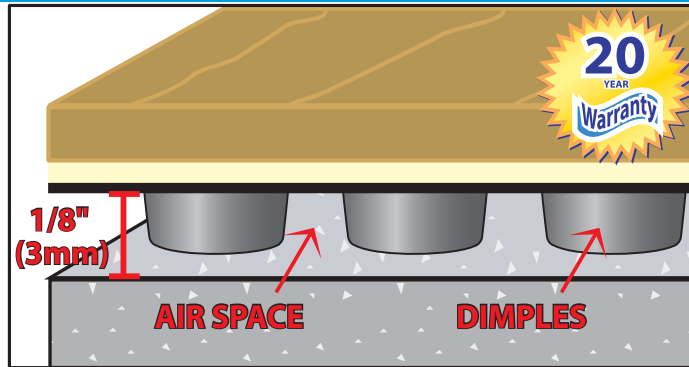

All-In-One Subfloor is a moisture barrier and thermal break membrane that can be used under carpet, laminate and engineered wood floors without the need for a plywood subfloor

- Controls moisture & mildew
- Floors are warmer and more comfortable to walk on
- No need for plywood, nails or glue
- Easy to transport and install
- Compatible with in floor heating



Part # Roll sizes

SA84166 3'3" x 50' 10" (166 ft²)- 1m x 15.5m

SA84332 6'7" x 50' 10" (332 ft²)- 2m x 15.5m

Height 3 mm (1/8") Strength 350 kN/m² (7200psf)

Proudly Offered By

CARPET, LAMINATE & ENGINEERED WOOD DIMPLED SUBFLOOR

No Plywood, No Nails, No Glue



SUPERSEAL

All-In-One Subfloor™



PRODUCT BENEFITS

Thermal Break = Warmer Floors

The dimples in the membrane lift the floor off the cold concrete creating a dry, warm and comfortable floor

Easy Installation

All-In-One is 10x faster and 90% lighter than plywood covered subfloors. It's quick and easy to install requiring no fasteners

Super Thin Profile - 1/8" (3mm)

Designed to fit under most existing baseboards and door casings making it a favorite of renovators and contractors

Economically Priced


A high performance, low cost subfloor membrane that saves you money by eliminating the need of additional expenses from plywood systems

Permanent Moisture Barrier

Made from tough long lasting plastic, All-In-One stops substrate moisture from absorbing into underlay, carpet and wood


No Mold & Mildew = Healthier Homes

All-In-One provides under floor ventilation allowing moisture to dry and helping to prevent mold and mildew growth

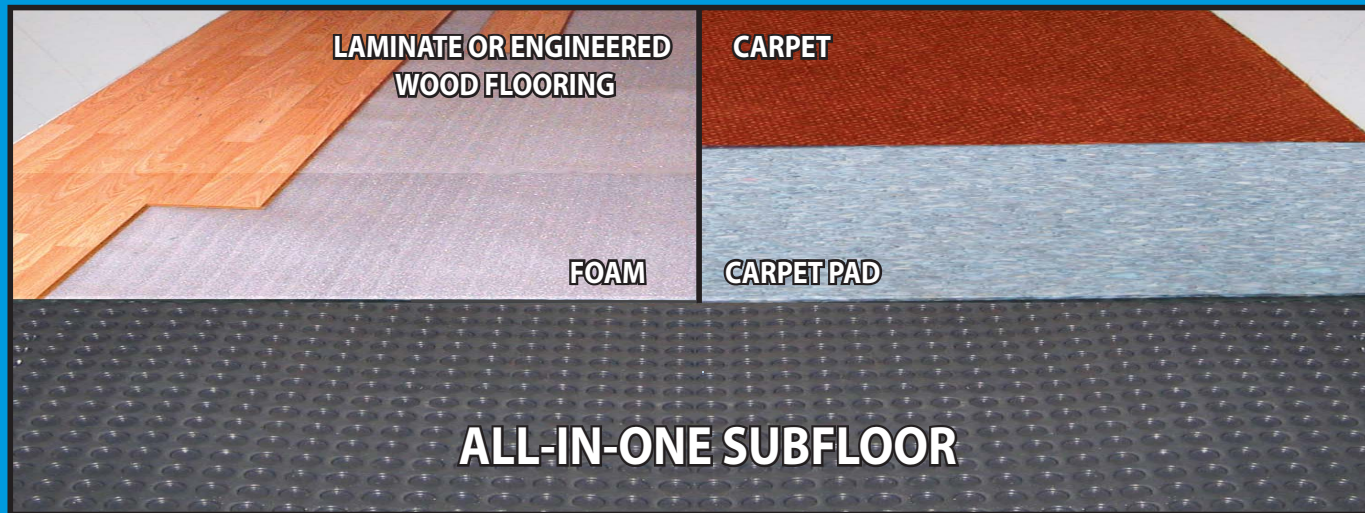


Moisture will always find a way through cracks or voids and into your home. The moisture can damage your flooring, attract mold and mildew and decrease the indoor air quality. SUPERSEAL All-In-One Subfloor blocks moisture, is resistant to alkalines and will not rot or degrade. All-In-One protects your homes value while providing you with a dry and comfortable home.

Laminate Installation

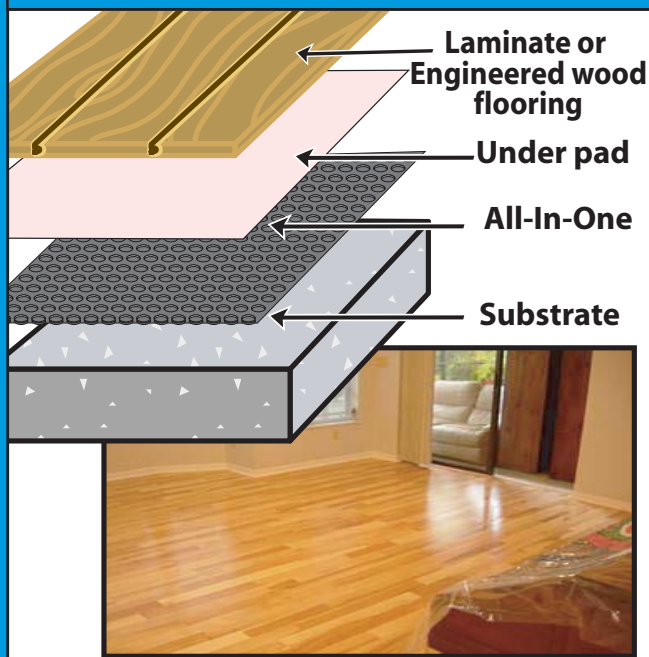

Carpet Installation

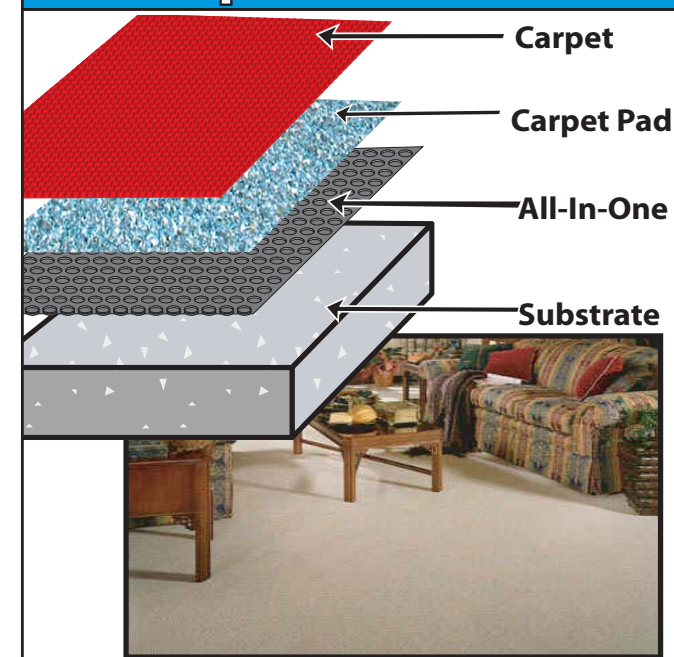

Not intended for load bearing walls.