



# SUPERSEAL Carpet Subfloor Installation Instructions

www.superseal.ca  
info@superseal.ca

Phone: 1-800-571-1877  
Fax: 1-604-856-2447

September 01, 2011 - present



## TOOLS REQUIRED

Measuring tape and Exacto knife or sharp sissors


## IMPORTANT INSTALLATION NOTES

Prior to installation, the Carpet Subfloor needs to be properly climatized for approximately 12-24 hours at a temperature between 60-80°F (15-26°C). The climatized roll should not be installed until the flooring is almost ready to be installed.

Cut and remove the tape that is keeping the roll together and loosen it up a little to allow it to climatize properly. You can also pre cut the roll to size before you climatize it, however you may have to trim the edges again before you install your flooring.

Properties	Values
Material - Dimpled Sheet	High-Density Polyethylene (HDPE)
Color - Dimpled Sheet	Black
Thickness - Dimpled Sheet	0.5 mm (20mil)
Area Weight (approx)	500 g/m <sup>2</sup>
Dimple Height	2.8mm (1/8")
Compressive Strength	750 kN/m <sup>2</sup> (15,600 psf)
Service Temp Range	-40° C to +80° C

PART #	ROLL SIZE
DD10162	3'3" x 50' - 162 ft <sup>2</sup> (1m x 15m)

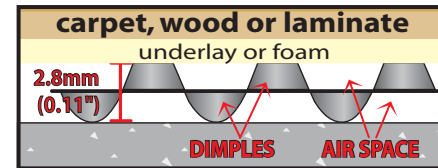


## STEP 1 - Unroll & Cut to Fit

Unroll the membrane and cut to fit the area required. Leave a ¼ inch space at walls, edges, posts etc...

## STEP 2 - Joining 2 Pieces Together

When joining 2 pieces, butt the edges of the membrane together and tape the seam using SUPERSEAL Subfloor Tape. For added protection, overlap and interlock the membrane by 1-2 inches first.

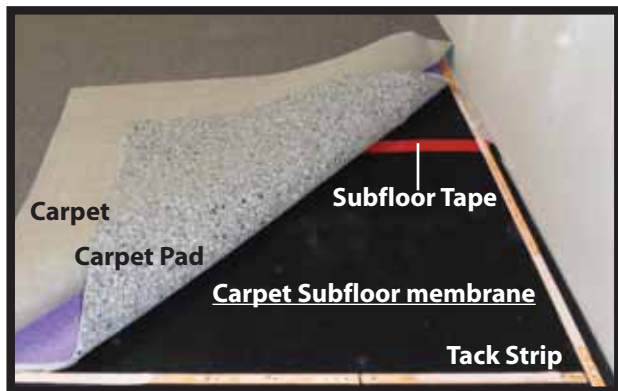

SUPERSEAL Subfloor tape is required for proper connection and sealing of the subfloor membrane. Other tapes do not compare, use SUPERSEAL.

2.83 in x 136 ft  
7.2cm x 41.5m

- ✓ Moisture Resistant
- ✓ Tear By Hand Design
- ✓ Can be Used Inside or Outside

## Installing the Tack Strip & Carpet

The design of the carpet subfloor allows you to nail the tack strip through the membrane as you normally would. Once fastened to the substrate, install your carpet pad and carpet as normal.

When installing the tack strip, you may require additional nails as they do not always take.

## ADDITIONAL NOTES

- Ensure your floor is flat or level prior to installation.
- Repair all bumps or divots.
- Laminate or engineered wood can be installed directly on top of Carpet Subfloor.
- If the ends are rolling up, back roll them or flip the membrane over.
- Do NOT install under a load bearing wall



Not intended for bearing walls.